


LED PANEL: 2' X 4'

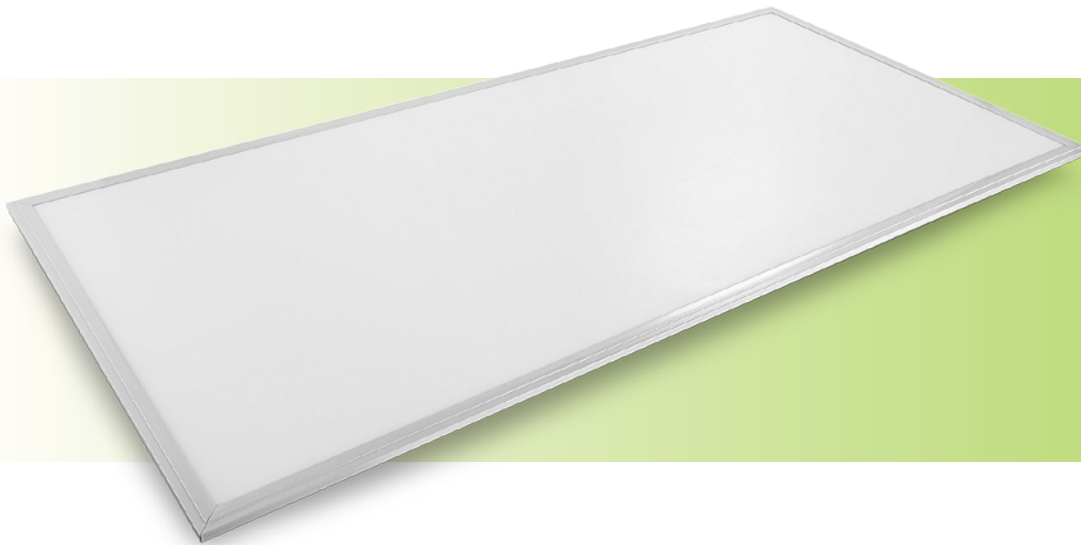

Specifications

Power Source:	100~277 VAC
Power:	72 watts
Replaces:	(4) 4' 128 watt Fluorescent fixture
Power Factor:	> 0.9
Luminous Efficacy:	90 lm/w
Lumens:	6200 lm
CRI:	80+
Operating Temperature:	-20C to 55C
Color Temperature:	4000K and 5000K
Size:	23" x 47" x 1.875"
Weight:	14 lb.
Dimmable:	Yes, with potentiometer dimmer

Benefits

- Designed as a replacement to fluorescent troffer fixtures
- Glare free fixtures that feature an even light distribution pattern
- Instant "ON" full brightness (including sub-zero temperatures)
- Average lifetime 50,000 hours

Features

- 5 year warranty
- Ultra slim design
- Indoor/outdoor enclosed usage (suitable for dry and damp locations)
- Acrylic frosted lens screen
- Earthquake clips provided for safety

Applications

- Airports
- Commercial Buildings & Office Spaces
- Hospitals & Medical Facilities
- Retail Spaces
- Schools

Optional Hardware

- 24MF: 2x4 Aluminum Mounting Fixture
- 24WR: 2x4 Wire Ropes

Ordering Information

Model:	FPL-24-72W
Kelvin:	Option of 4000K or 5000K
Voltage:	1 (100~277 VAC)
Example:	FPL-24-72W-4000K-1-OPTIONS

ALLED Lighting Systems

101 Randolph Street | Ellwood City, PA 16117
724.752.0326 | www.alled.co

Making **Green** Brighter!™

